

124 SYLVANIA PLACE
SO. PLAINFIELD, NJ 07080-9998
VISIT OUR WEBSITE
WWW.LIFTEC.COM



CUSTOMER SERVICE HOTLINE
1-800-872-4924



IAWP-9.6



\$13,995.00

Delivered



Weighing only 1212 lbs. it is compact and easily fits into most elevators. Able to drive through standard doors without having to leave the platform. With 35% gradeability, it can easily climb beavertails or a ramp into a truck, van or pickup. Also features a tow hook for easy winching on trucks, roll backs, while using a removable platform control box. Wheel-locking device allows driving forward and backward in a straight line. Powered by 2 TROJAN 12 volt high amp batteries that produce a duty cycle of over 250 lift cycles or the ability to drive in excess of 7 miles, then easily recharged in hours using its on-board charger. Large LCD readout in the ground module provides system diagnostic and status. Platform entry is achieved using a step 15" off the ground and then through a single saloon style swing gate.



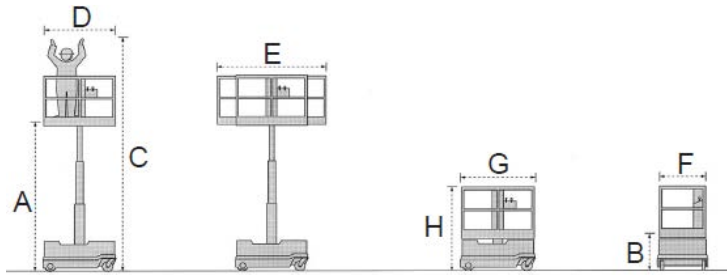

ZERO inside turning radius
39 in. outside turning radius

MODELS	AEUP AWP-9.6	
MEASUREMENTS	Metric	US
Platform Height	mm 2900	A 9 ft 6 in
Entry Step	mm 400	B 1 ft 3 in
Working Height	mm 4900	C 16 ft
Platform Width	mm 680	D 2 ft 2 in
Platform Length W/decks ext	mm 1700	E 5 ft 6 in
Width	mm 760	F 2 ft 5 in
Length Stowed	mm 1215	G 3 ft 11 in
Height Stowed	mm 1690	H 5 ft 6 in
Platform Capacity w/ decks ext	180 kg	397 lbs
Ground Clearance	mm 35	1.4 in
Ground Clearance with Loading Device	mm 70	3 in
Rated Number of Occupants	2	2
PERFORMANCE		
Drive Speed Stowed	3 km/h	1.9 mph
Drive Speed Elevated	0,6 km/h	0.35 mph
Inside Turning Radius	Zero	Zero
Outside Turning Radius	mm 1000	39"
Gradeability	35%	35%
Raise/Lower Speed	16 / 21 sec	16 / 21 sec
Controls	One Hand Proportional Controller	
Tires	Solid Rubber, Non Marking	
Front Wheel: diameter / width	mm 200 / 70	8 / 2.8 in
Rear Wheel: diameter / width	mm 300 / 90	12 / 3.6 in
POWER		
Power Source	110/220 V ca 24 V 12 Ah automatic	110/220 V ca 24 V 12 Ah automatic
Batteries	2 - 12V 85Ah	2 - 12V 85 Ah
Hydraulic System Capacity	20 lt	5.3 gal
Unit Weight	550 kg	1212 lbs
STANDARD COMPLIANT	Ansi A92.6, CE Compliant, AS1418.10 (int)	

The BEST warranty in the industry:
10 YEARS on the mast and cylinder
5 YEARS on all components
1 YEAR on batteries, not prorated

Standard features:

- Built-in Tilt Sensor
- Flashing Light
- Audible Alarm
- (2) Trojan 12 Volt Batteries
- On-board Charger
- Tow Hook

Available Options:

Deluxe Metal Tool Tray Add\$250.00
Wheel Assist Kit Add \$395.00

